


The RF Line Broadband RF Array for TV Transmitter

The RFA8180B is a solid state class AB amplifier and is specifically designed for TV transposers and transmitters. This amplifier incorporates microstrip technology and reliable Motorola push-pull transistors.

- Specified 28 Volts, 470–860 MHz Characteristics
Output Power — 180 Watts (CW)
Gain — 8 dB Min (@ 180 W)
- 50 Ω Input and Output Impedance

RFA8180B

180 W C.W. (28 V)
270 W P. SYNC. (32 V)
470–860 MHz
RF POWER AMPLIFIER

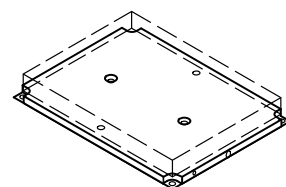

CASE 429-02, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Supply Voltage	V_{CC}	32	Vdc
Quiescent Current	I_{CQ}	2 [2 x 300]	mAdc
Input Power	P_{in}	35	W
Storage Temperature Range	T_{stg}	-40 to +100	$^{\circ}C$
Operating Temperature (1)	T_{op}	-20 to +70	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$, $V_{CC} = 28 V$, $I_{CQ} = 2 \times 200 mA$, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Instantaneous Bandwidth	BW	470	—	860	MHz
Input Return Loss	IRL	—	—	-15	dB

FUNCTIONAL TESTS IN CW (SOUND) ($T_C = 25^{\circ}C$, $V_{CC} = 28 V$, $I_{CQ} = 2 \times 200 mA$, $f = 470-860 MHz$, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Power Gain ($P_{out} = 180 W$)	G_p	8	—	—	dB
Gain Ripple ($P_{out} = 180 W$)	G_{rple}	—	—	± 1	dB
Output Power @ 1 dB Compression	P_{out}	180	—	—	W
Mismatch Tolerance ($P_{out} = 180 W$)	VSWR	3:1	—	—	—
Efficiency ($P_{out} = 180 W$)	η	48	51	—	%

FUNCTIONAL TESTS IN VIDEO (standard black level)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Output Power (synch.) ($V_{CC} = 28 Vdc$)	P_{out1}	230	—	—	W
Peak Output Power (synch.) ($V_{CC} = 32 Vdc$)	P_{out2}	270	—	—	W

NOTE:

- Temperature is measured at temperature test point (on the flange of the transistor).

**TYPICAL CHARACTERISTICS
CW — WIDEBAND**

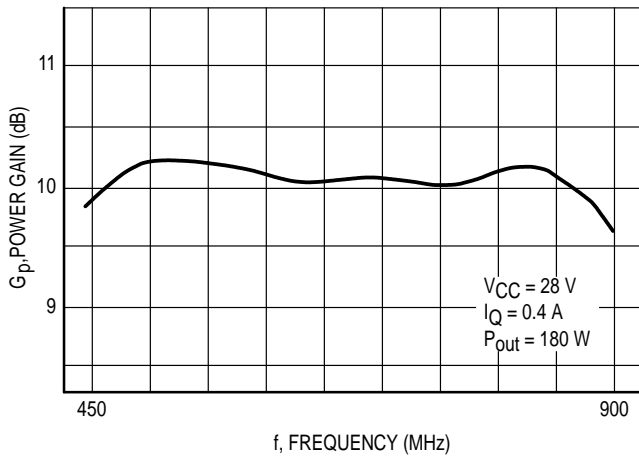


Figure 1. Power Gain versus Frequency

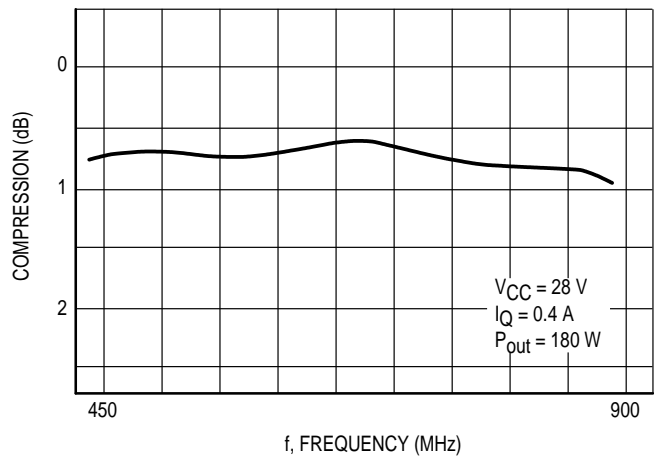


Figure 2. Gain Compression versus Frequency

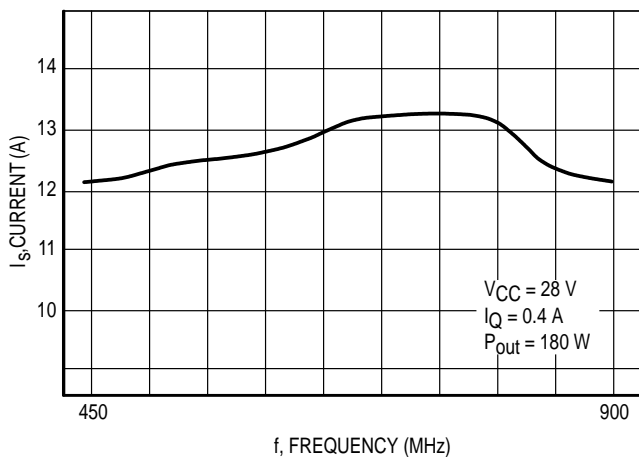


Figure 3. Supply Current versus Frequency

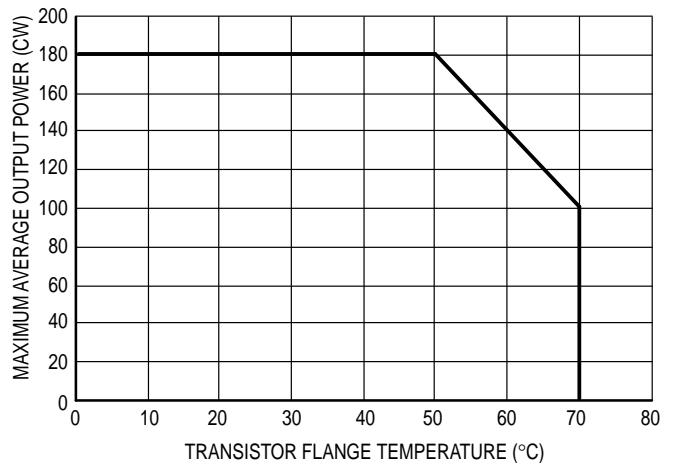


Figure 4. Maximum Average Output Power versus Temperature

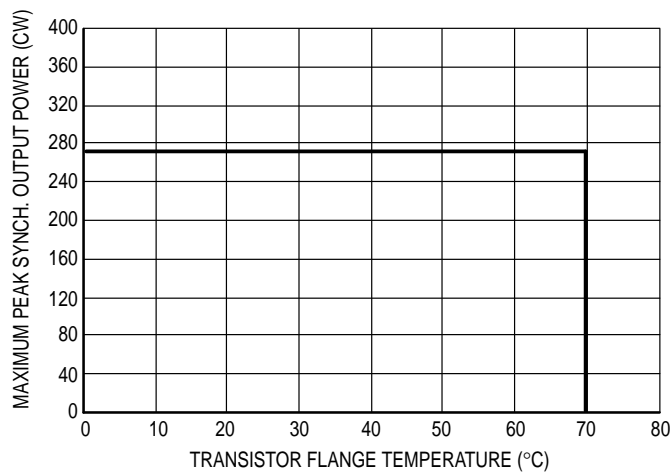


Figure 5. Maximum Peak Synch. Output Power (B/G Standard) versus Temperature

TYPICAL VIDEO CHARACTERISTICS @ f = 860 MHz

TEST CONDITIONS:
 DIFF. Gain, 10 Steps
 Channel 61
 V_{CE} = 28 V
 I_Q = 0.4 A



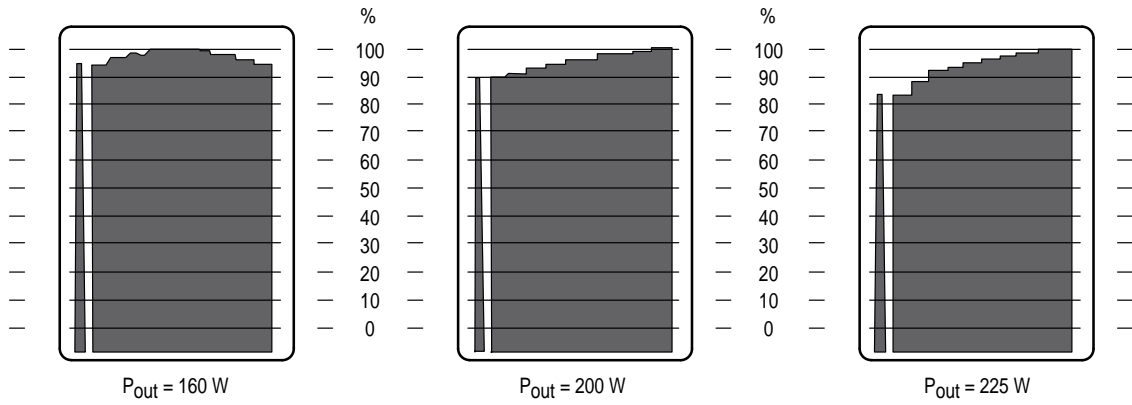


Figure 6. Differential Gain

APPLICATIONS INFORMATION

HEATSINK TOOLING

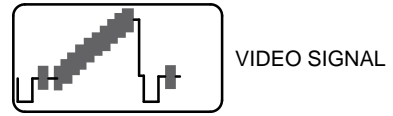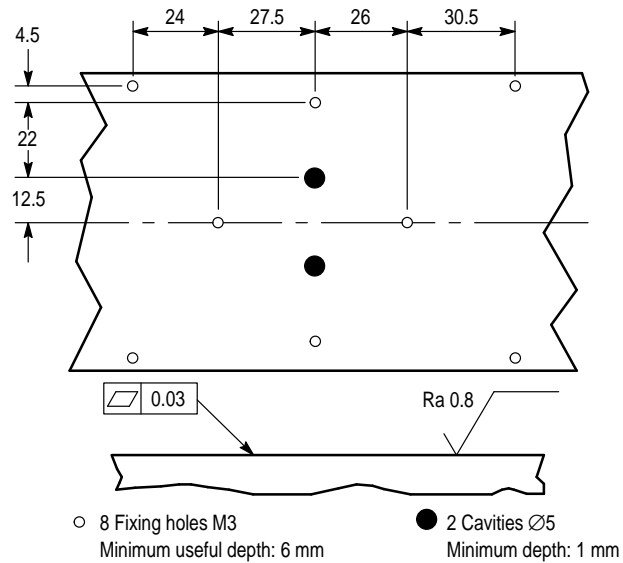

MOUNTING RECOMMENDATIONS

THERMAL COMPOUND


- Paste with silicones: SICERONT KF Ref. 1201 Recommended.
- Thickness: Optimum between 0.06 mm and 0.15 mm, on the whole back surface of the amplifier.
(Typical volume: 700 mm³ for 0.1 mm thickness)
(Equivalent weight: 1.5g for 2.2 density paste).

SCREWS

- Socket head cap screws: CHC M3 x 10 for Copper/Aluminum Heatsink.
- Material: Nickel plated steel.


WASHERS

- Split lock washers WZ Ø3 + Flat washers ZU Ø3.

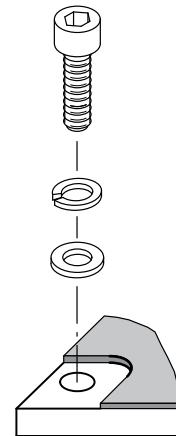

MOUNTING RECOMMENDATIONS (continued)


TIGHTENING ORDER

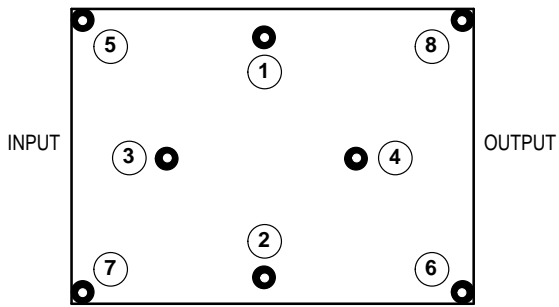

Recommended Torque: 12 Kg.cm (10.5 in.lbs)

MOUNTING VERIFICATION

Make the amplifier work at nominal RF conditions, and measure temperature on points 1, 2, 3, and 4.

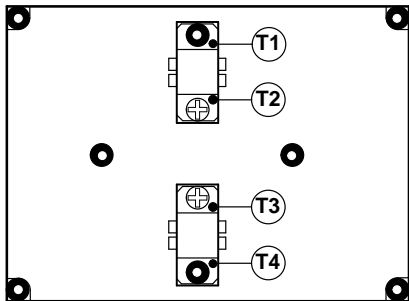


Characteristic	Typ	Max	Unit
T1, T2, T3, T4	—	70	°C
$\Delta(T1, T2), \Delta(T3, T4)$	3	5	°C

CLEANING

Some components of the RFA8180B amplifier are not qualified for every kind of cleaning solvent; do not clean the amplifier in a solvent bath. Local cleaning is recommended.

PACKAGE DIMENSIONS

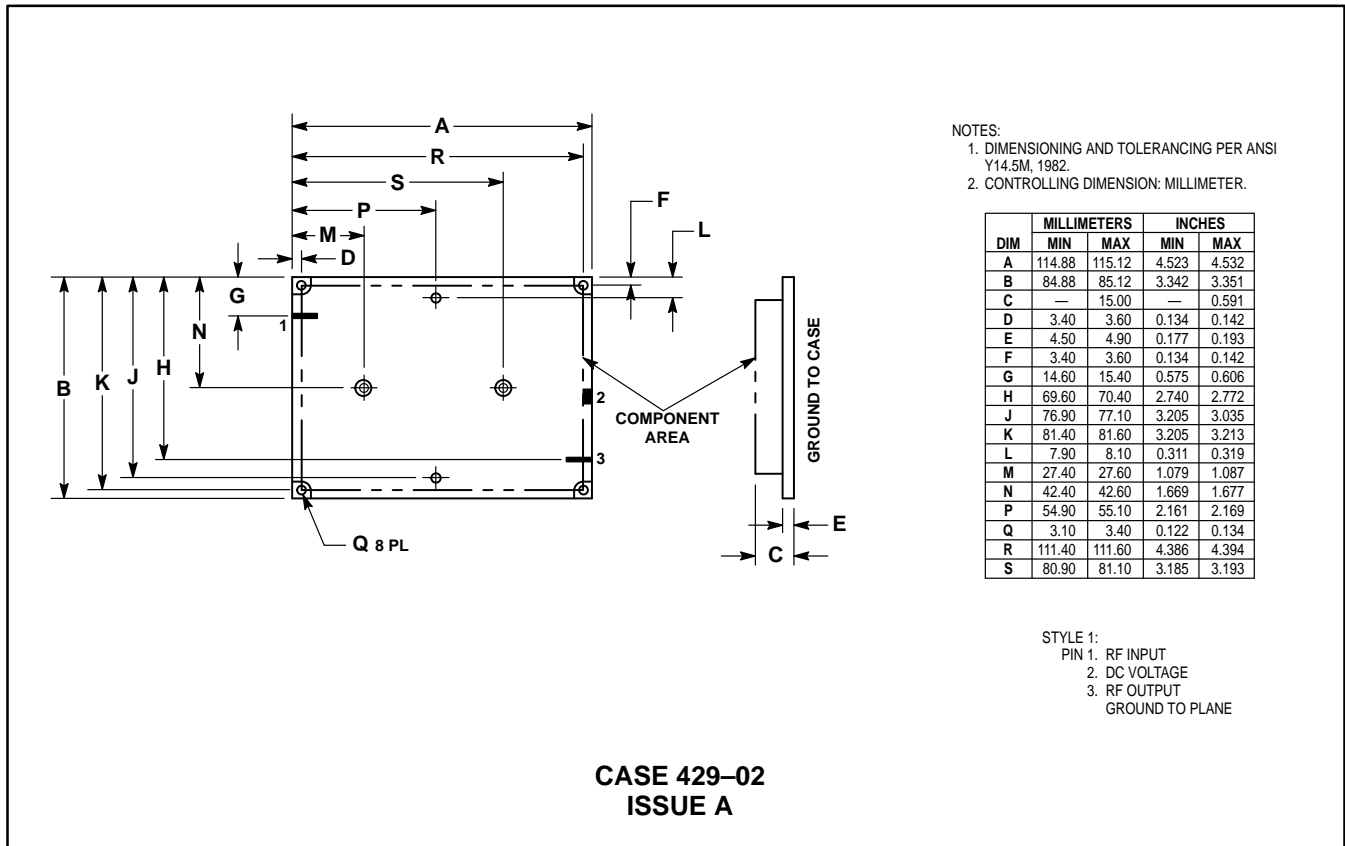

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	114.88	115.12	4.523	4.532
B	84.88	85.12	3.342	3.351
C	—	15.00	—	0.591
D	3.40	3.60	0.134	0.142
E	4.50	4.90	0.177	0.193
F	3.40	3.60	0.134	0.142
G	14.60	15.40	0.575	0.606
H	69.60	70.40	2.740	2.772
J	76.90	77.10	3.205	3.035
K	81.40	81.60	3.205	3.213
L	7.90	8.10	0.311	0.319
M	27.40	27.60	1.079	1.087
N	42.40	42.60	1.669	1.677
P	54.90	55.10	2.161	2.169
Q	3.10	3.40	0.122	0.134
R	111.40	111.60	4.386	4.394
S	80.90	81.10	3.185	3.193

STYLE 1:
 PIN 1. RF INPUT
 2. DC VOLTAGE
 3. RF OUTPUT
 GROUND TO PLANE

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:
 USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
 EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.
 JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.
 ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

